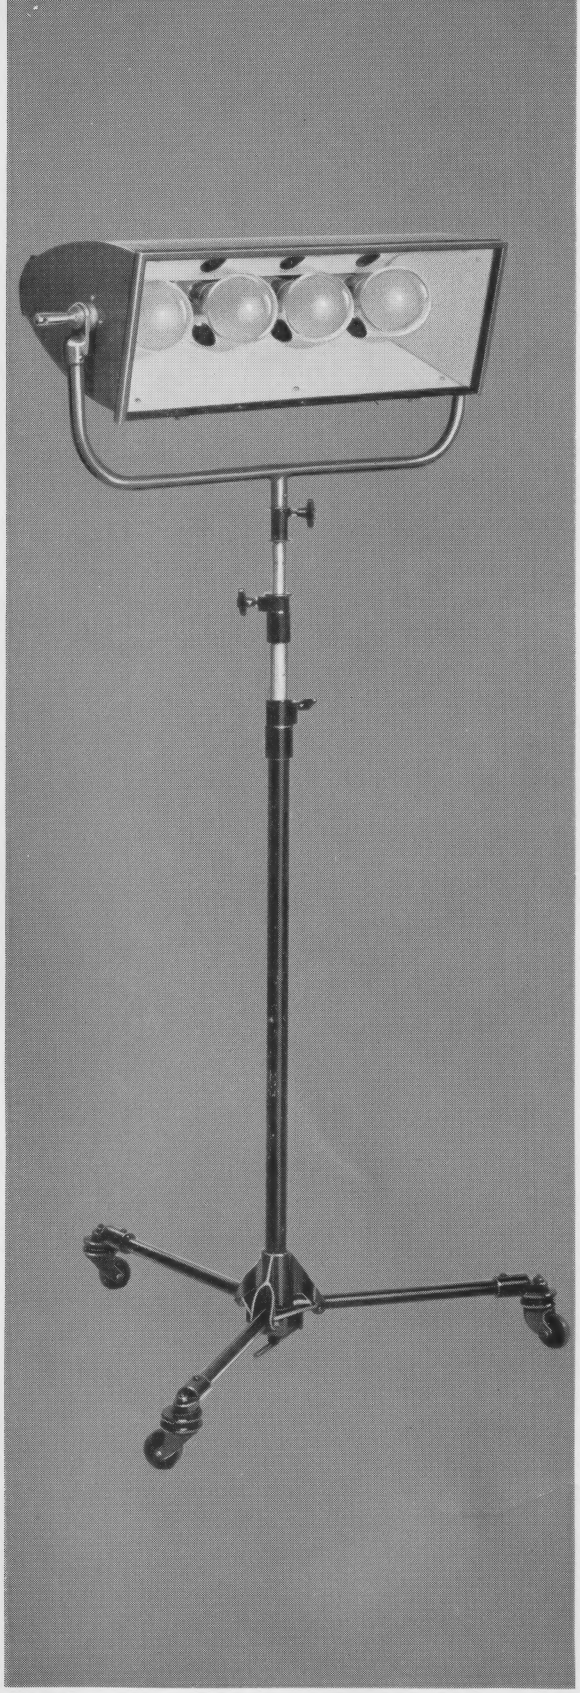

'QUADS' M-R Type 6

'Quads' M-R Type 6

General-purpose front and overhead floodlighting unit of great adaptability. Provides for four bulbs, each with independent switching. May be mounted vertically or horizontally.

SPECIFICATION

LAMPHEAD M-R Type 6

CONSTRUCTION	Double skin, light alloy housing.
YOKE	Steel tubing with non-ferrous metal fittings, $\frac{5}{8}$ inch diameter spuds for horizontal or vertical mounting, with tilt locking handle.
REFLECTOR	Matt-white, silicone paint.
SWITCHING	Four double pole toggle-type switches.
CABLE	25 feet of 3-core rubber covered, attached to lamphead.
SOCKETS	Four Edison screw type.
BULB TYPE AND RATING	(not included in price of lamp). Photopearl or Photoflood. 250 watt. 100/250 volt. Lamp Ref. PP/1. 500 watt. 100/250 volt. Lamp Ref. PP/2. 500 watt. 100/250 volt. Lamp Ref. Photopearl.

STAND M-R Type S500

(not included in price of lamp).

Double lift, folding type.

CONSTRUCTION	Steel tubing, non-ferrous metal fittings with 2 inch rubber-tyred castors.
SOCKET DIAMETER	$\frac{5}{8}$ inch.

MOLE-RICHARDSON